


LOADING METHOD FOR PALLETIZED/STRETCH-WRAPPED NON-INTERIOR BULKHEAD EQUIPPED RAILCARS

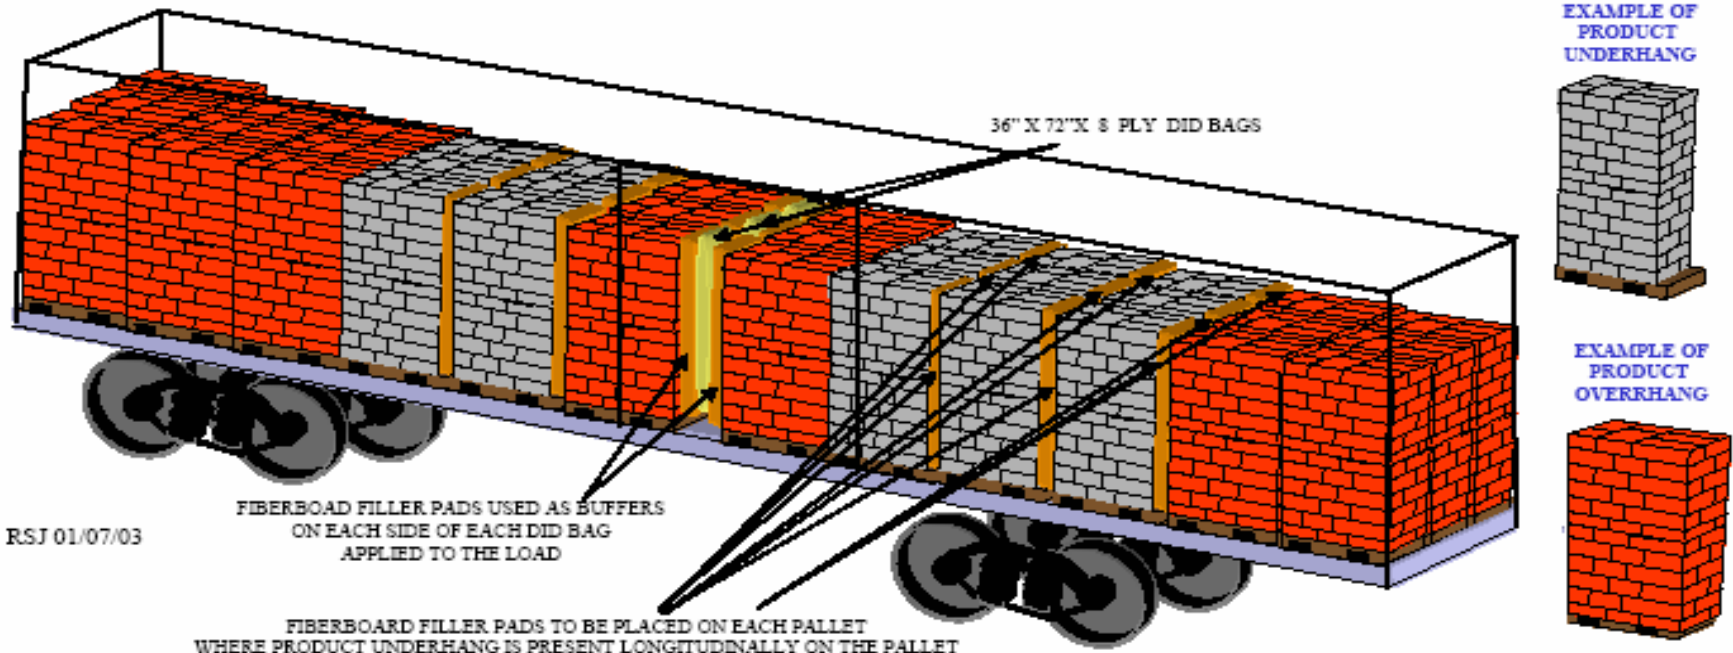

RSJ 01/07/03

NOTE DID BAGS MUST NOT BE USED IN A VOID LARGER THAN 12", MUST BE INFLATED BETWEEN 4 & 6 PSI DEPENDING ON PRODUCT LOADED, MUST BE ADEQUATELY BUFFERED IF PLACED AGAINST ROUGH SURFACES AND MUST NOT CONTACT FLOOR OF RAILCAR AFTER INFLATION.